

# HOSE CONTAINMENT GRIPS

## DOUBLE EYE

### APPLICATIONS

Hose containment grips are designed to prevent whipping of pressurised hose in the event of the hose separating from the fitting. The Chinese finger style design grips the hose in the unlikely event of separation which helps to prevent injury to operators or damage to nearby equipment.

### FEATURES

- Two eye design ensures secure anchored connections
- The breaking load displayed in the table represents a strength of guarantee and safety


### MATERIAL

Galvanised steel, stainless steel or aramid fibre.



### GALVANISED HOSE CONTAINMENT GRIPS

#	#	Diameter	No. of plies	Diameter of wire rope	Breaking load
Length 400mm	Length 600mm	min - max		mm	kg
DHG01.400	DHG01.600	8 - 14	4 x 2	1.00	570
DHG02.400	DHG02.600	10 - 15	4 x 2	1.25	800
DHG03.400	DHG03.600	13 - 21	5 x 2	1.25	1000
DHG04.400	DHG04.600	15 - 20	5 x 2	1.50	1400
DHG05.400	DHG05.600	20 - 25	5 x 2	1.50	1400
DHG06.400	DHG06.600	17 - 31	5 x 2	1.50	1400
DHG07.400	DHG07.600	25 - 30	5 x 2	1.50	1800
DHG08.400	DHG08.600	25 - 30	6 x 2	1.75	2800
DHG09.400	DHG09.600	26 - 30	6 x 2	1.50	1800
DHG10.400	DHG10.600	30 - 40	6 x 2	1.75	2800
DHG11.400	DHG11.600	30 - 40	6 x 2	2.00	3900
DHG12.400	DHG12.600	27 - 52	6 x 2	2.00	3900
DHG13.400	DHG13.600	40 - 50	6 x 2	2.00	3900
DHG14.400	DHG14.600	45 - 75	6 x 2	2.25	5700
DHG15.400	DHG15.600	50 - 60	6 x 2	2.00	4600
DHG16.400	DHG16.600	50 - 60	7 x 2	2.25	5700
DHG17.400	DHG17.600	60 - 75	6 x 2	2.25	6800
DHG18.400	DHG18.600	72 - 110	8 x 2	2.25	8000
DHG19.400	DHG19.600	75 - 90	8 x 2	2.25	8000
DHG20.400	DHG20.600	90 - 115	8 x 2	2.25	8000

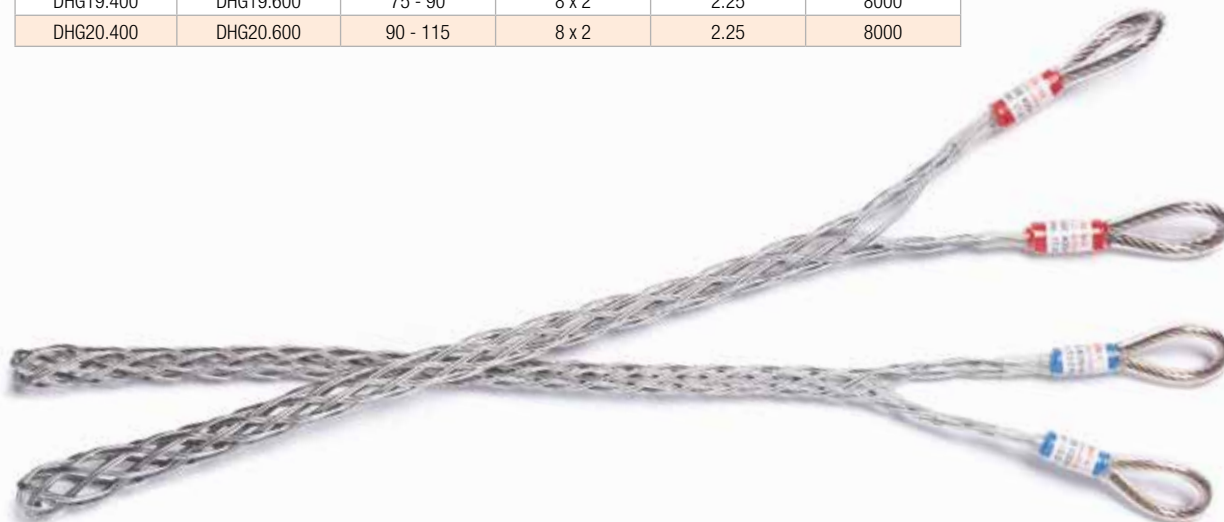

# HOSE CONTAINMENT GRIPS

## DOUBLE EYE

### STAINLESS STEEL HOSE CONTAINMENT GRIP

#	#	Diameter	No. of plies	Diameter of wire rope	Breaking load
Length 400mm	Length 600mm	min - max		mm	kg
DHS01.400	DHS01.600	7 - 14	4 x 2	1.00	670
DHS02.400	DHS02.600	10 - 15	5 x 2	1.25	1200
DHS03.400	DHS03.600	13 - 21	5 x 2	1.25	1200
DHS04.400	DHS04.600	15 - 20	5 x 2	1.50	1600
DHS05.400	DHS05.600	20 - 25	5 x 2	1.50	1600
DHS06.400	DHS06.600	17 - 31	5 x 2	1.50	1600
DHS07.400	DHS07.600	25 - 30	6 x 2	1.50	2500
DHS08.400	DHS08.600	25 - 30	6 x 2	1.75	3400
DHS09.400	DHS09.600	20 - 36	6 x 2	1.50	2500
DHS10.400	DHS10.600	30 - 40	6 x 2	1.75	3400
DHS11.400	DHS11.600	27 - 52	6 x 2	2.00	4600
DHS12.400	DHS12.600	40 - 50	6 x 2	2.00	4600
DHS13.400	DHS13.600	45 - 70	6 x 2	2.25	6800
DHS14.400	DHS14.600	50 - 60	7 x 2	2.00	5700
DHS15.400	DHS15.600	60 - 75	7 x 2	2.25	7800
DHS16.400	DHS16.600	72 - 110	8 x 2	2.25	9100
DHS17.400	DHS17.600	75 - 90	8 x 2	2.25	9100
DHS18.400	DHS18.600	90 - 115	8 x 2	2.25	9100

### ARAMID FIBRE HOSE CONTAINMENT GRIPS

#	Diameter	Length	No. of plies	Diameter of aramid fibre	Breaking load
	min - max	mm		mm	kg
2DA01	6-9	400.0	8 x 1	1.50	1000
2DA02	10-15	400.0	4 x 2	1.50	1650
2DA03	14-25	500.0	4 x 2	1.75	2500
2DA04	20-30	600.0	6 x 2	1.50	2900
2DA05	25-35	600.0	6 x 2	1.75	4000
2DA06	30-40	700.0	6 x 2	1.75	4000
2DA07	40-50	700.0	6 x 2	2.00	5500
2DA08	50-60	800.0	6 x 2	2.25	7500
2DA09	60-75	800.0	8 x 2	2.25	10000
2DA10	75-90	800.0	8 x 2	2.25	10000

