




INSTA-LOCK™ DUST CAP FEMALE CAP FOR MALE INSTA-LOCK

Product specifications

Size inch	Aluminum	Stainless Steel	Max. width with cam arms closed (O) inch	Overall Length (L) inch	OD with cam arms extended (C) inch	Distance chain lug extends from body inch
1/2	DC050AL	DC050SS	2.469	1.625	4.969	0.375
3/4	DC075AL	DC075SS	2.781	1.625	5.261	0.375
1	DC100AL	DC100SS	2.920	2.086	5.367	0.375
1 1/4	DC125AL	DC125SS	3.510	2.360	7.669	0.375
1 1/2	DC150AL	DC150SS	3.830	2.400	7.967	0.375
2	DC200AL	DC200SS	4.210	2.633	8.340	0.375
2 1/2	DC250AL	DC250SS	4.720	2.786	8.837	0.375
3	DC300AL	DC300SS	5.680	2.957	10.435	0.375
4	DC400AL	DC400SS	6.780	3.134	11.538	0.375
5	DC500AL	DC500SS	7.813	3.219	12.571	0.375
6	DC600AL	DC600SS	9.344	3.500	16.096	0.375

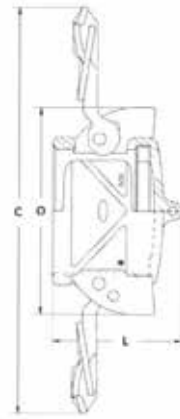

Note: Contitech® Insta-Lock fittings are never to be used in steam or compressed air service. Contitech® Insta-Lock cam arms are designed exclusively for Insta-Lock fittings.

Warning: Dust Caps and Dust Plugs are not to be used in pressure applications for safety and environmental reasons.

APPLICATIONS

Dust cap is used to seal the pipe system and hose assemblies during non-use or transfer of assembly.

MATERIALS

Aluminum, 316# stainless steel and brass (standard Nitrile gasket).

CONSTRUCTION

Branding: Contitech® DC200SS.