


INSTA-LOCK™ INTERLOCKING STAINLESS MALE NPT & BSP HOSE STEMS



Product specifications

| Size inch | NPT | BSP | Maximum OD (O) inch | Overall Length (L) inch | Exposed Length (L) inch | Minimum ID (I) inch |
|--------------|----------|------------|---------------------------|-------------------------------|-------------------------------|---------------------------|
| 1 | GTM100SS | GTM100SSBT | 1.315 | 4.375 | 1.750 | 0.830 |
| 1 1/4 | GTM125SS | GTM125SSBT | 1.660 | 4.500 | 1.875 | 1.130 |
| 1 1/2 | GTM150SS | GTM150SSBT | 1.900 | 4.750 | 2.000 | 1.360 |
| 2 | GTM200SS | GTM200SSBT | 2.375 | 5.250 | 2.125 | 1.820 |
| 2 1/2 | GTM250SS | GTM250SSBT | 2.875 | 6.125 | 2.625 | 2.240 |
| 3 | GTM300SS | GTM300SSBT | 3.500 | 7.000 | 2.625 | 2.730 |
| 4 | GTM400SS | GTM400SSBT | 4.500 | 7.625 | 3.000 | 3.710 |

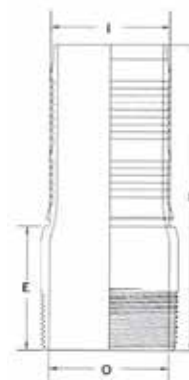

Note: Contitech® Insta-Lock fittings are never to be used in steam or compressed air service.

APPLICATIONS

Interlocking stainless steel male NPT and BSP hose stem fittings are designed to be attached to a rubber hose with the use of a Continental ContiTech Insta-Lock™ Ferrule. Consult the chemical resistance guide for specific chemical resistance recommendations.

MATERIALS

316# stainless steel.

PRESSURE RATING

Sizes 1" to 2" 250 psi, 2 1/2" to 4" 150 psi. Recommended working pressure ratings based on ambient temperature 70°F (21°C).



Please Note: We reserve the right to make technical changes without notice.