

# DUCTILE IRON BALL VALVE

## TBAD-FP SERIES


### FEATURES

- 2000 WOG (Full port).
- Ductile iron body.
- Blow out proof stem.
- (1" 2") RPTFE / (3" 4") Delrin seat.
- Inspection and test: AP1598.
- Threads conform to ASME B1.20.1 (NPT).
- NACE MR-01-75.




### Parts and Materials


#	Description	Material
1	Body	ASTM A395 DI
2	Body Seal	Viton
3	Adaptor	ASTM A395 DI
4	Seats	PTFE + 15% GF / DERLIN
5	Ball	SS420
6	Stem	ASTM A276 420
7	Thrust Bearing	PTFE
8	Stem Seal	Viton
9	Stem Seal	Viton
10	Stem Bearing	PTFE
11	Stop Plate	Steel Plate
12	Pin with Chain	Stainless Steel
13	Retainer Ring	Spring Steel
14	Stop Pin	Spring Steel
15	Hexagon Bolts	Carbon Steel
16	Grease Zerk	Carbon Steel
17	Handle	Ductile Iron

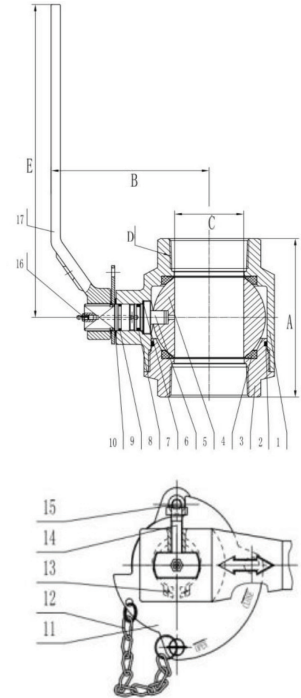

### Dimensions

Size	#	Connection	Pressure	 Kg	A	B	C	D	E
inch				lbs	inch	inch	inch	inch	inch
1	TBAD06R20F	FP	2000	4.25	4.02	3.39	1.00	11.5NPT	6.57
2	TBAD09R20F	FP	2000	17.97	6.00	5.51	2.02	11.5NPT	10.00
2 1/2	TBAD10K20F	FP	2000	28.99	7.00	6.35	2.56	8NPT	15.00
3	TBAD11L20F	FP	2000	42.33	8.74	6.85	2.99	8NPT	15.00
4	TBAD12L20F	FP	2000	52.69	9.40	6.77	3.94	8NPT	29.53

### Pressure Temperature Ratings

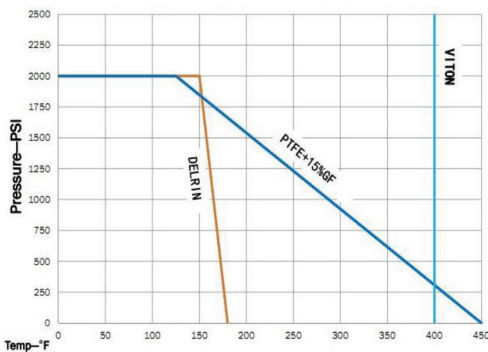

**Please Note:** We reserve the right to make technical changes without notice.