

A-JET

SEWER JETTING



Sewer jetting applications

#	Ø				⌚		🌿		⤵		Kg kg/m
	DN	size	mm	inch	bar	psi	bar	psi	mm		
AJ200-08	12	-08	12.7	1/2	20.6	2,900	500	7,250	100.0	0.23	
AJ200-12	20	-12	19.2	3/4	29.6	2,900	500	7,250	220.0	0.42	
AJ200-16	25	-16	25.3	1	38.0	2,900	500	7,250	300.0	0.61	
AJ200-20	32	-20	31.9	1 1/4	48.5	2,900	500	7,250	350.0	1.14	



APPLICATIONS

Hydrodynamic cleaning of sewers.

FEATURES

- Fibre reinforced product meaning low weight and high flexibility
- Abrasion resistant cover
- Excellent cover bonding

CONSTRUCTION


Core tube: Special PE compound.
Pressure reinforcement: Two braided layers of high tensile synthetic yarn.
Cover: Abrasion and weather resistant TPU compound.
Colour: Yellow (other colours available upon request).

TEMPERATURE RANGE

-20°C to 60°C.

FITTINGS

BSP Male and Swivel Female

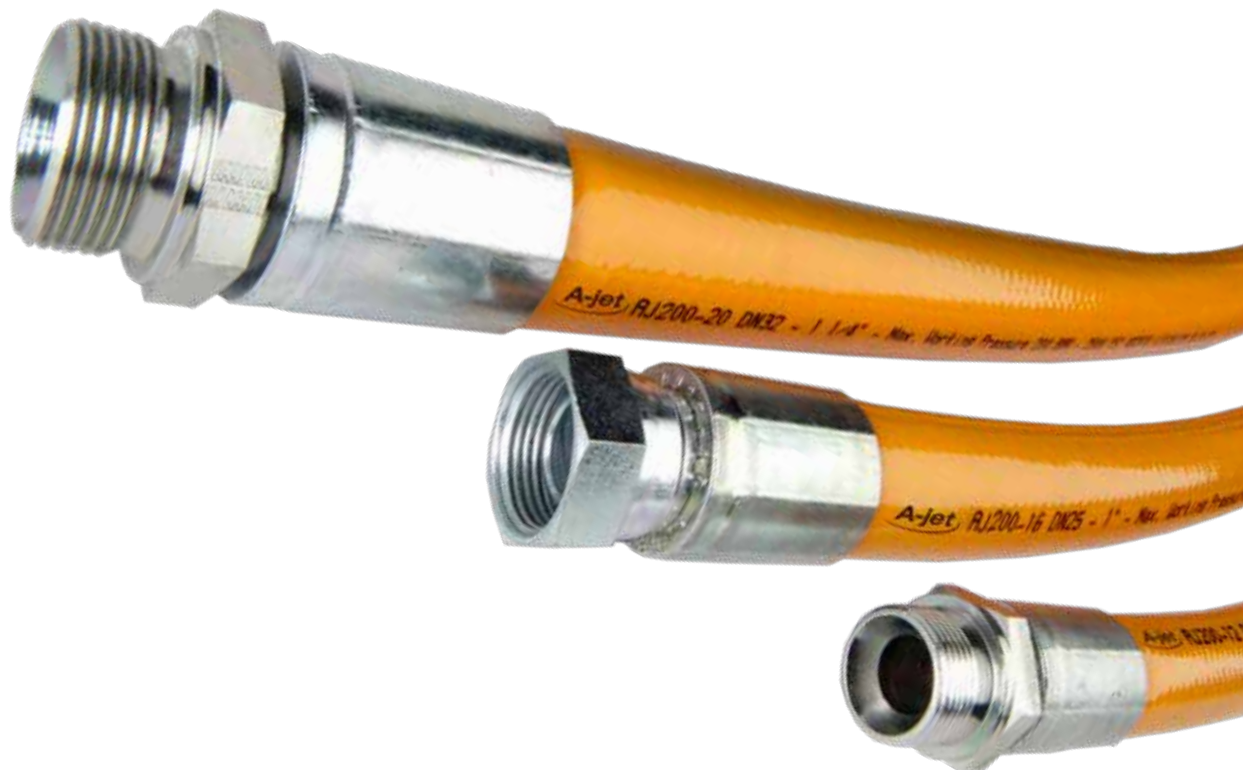

Please Note: We reserve the right to make technical changes without notice.