

A-JET

SEWER JETTING



Sewer jetting applications

#	Ø				⌚		🌿		⤵	⚖	
	DN	size	mm	inch	mm	bar	psi	bar	psi	mm	kg/m
AJ08-BLUE	12	-08	12.7	1/2	20.6	207	3,000	515	7,500	75	0.23
AJ12-BLUE	20	-12	19.2	3/4	29.6	207	3,000	515	7,500	125	0.42
AJ16-BLUE	25	-16	25.3	1	38.0	207	3,000	515	7,500	200	0.61
AJ20-BLUE	32	-20	31.9	1 1/4	48.5	207	3,000	515	7,500	250	1.14



APPLICATIONS

For high pressure water jetting and drain cleaning.

FEATURES

- European made, premium product.
- Abrasion resistant polyurethane cover provides exceptional cut and fungus resistance.
- Fibre reinforced product meaning low weight and high flexibility
- Excellent cover bonding helps prevent hose damage in aggressive applications.

CONSTRUCTION


Core tube: Special PE compound.
Pressure reinforcement: Two braided layers of high tensile synthetic yarn.
Cover: Abrasion and weather resistant TPU compound.
Colour: Blue (Main Hose) and Yellow (Leader Hose).

TEMPERATURE RANGE

-20°C to 60°C.

FITTINGS

BSP Male and Swivel Female
 NPT Male and NPSM Female

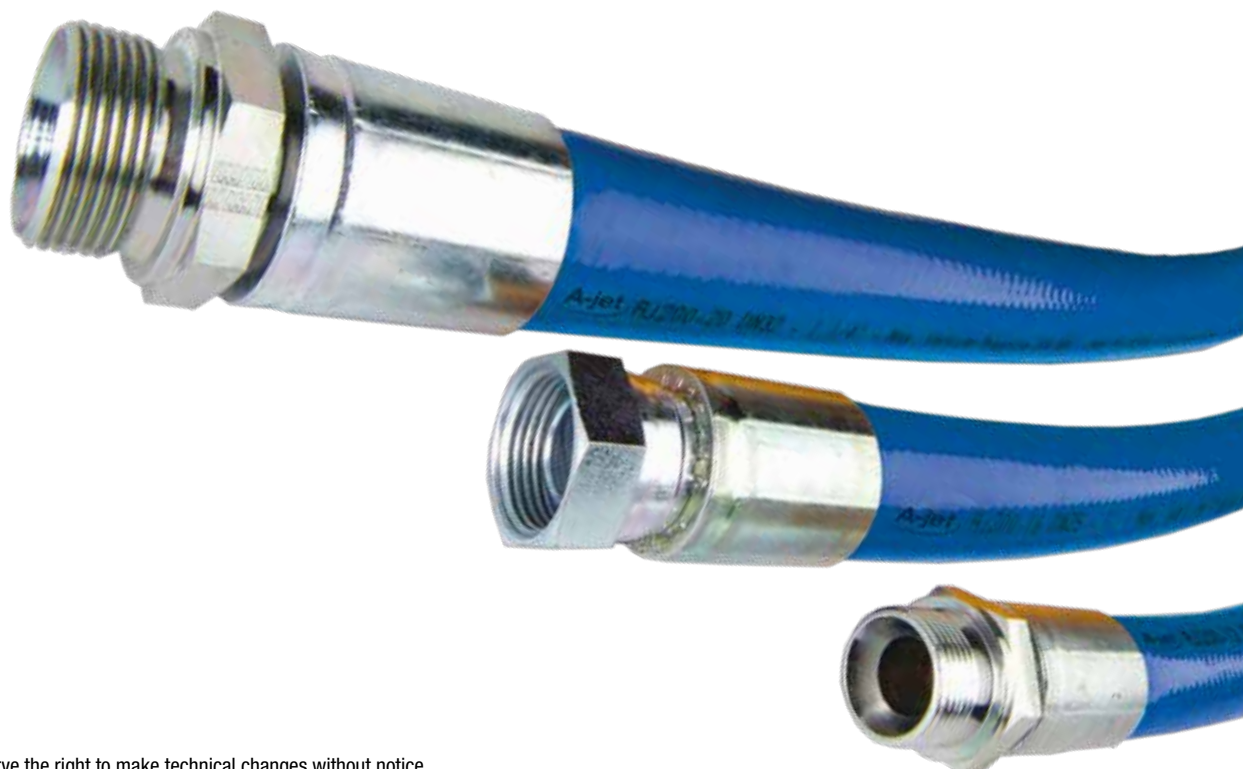

Please Note: We reserve the right to make technical changes without notice.