

PVTX BOP

FLAT FACE SCREW API 16D 316SS



Technical Data

Normal size				Max working pressure MPa	Rated flow l/min	Max flow rate l/min	Min burst pressure			Fluid spillage cc
DNP	BG	ISO	mm				Male MPa	Female MPa	Coupled MPa	
25	4	19	14.5	25	100	200	110	110	110	0.020

APPLICATIONS

Same as the PST4 but just add in 316 SS. Suitable for Offshore Rig and BOP applications.

FEATURES

- Flat Face Connection.
- Screw together lock.
- Quick Connection.
- Interchange: Stucchi VEP.
- Red Colour code to Identify BOP Coupler.
- API16D (Qualification Fire Test API Specification 16 D (Spec 16D Sec 10), Second Edition, July 2004).
- 316 SS Rust Resistant.


CONSTRUCTION

Occlusion: Flat face.
Material: Internals in steel, externals in stainless AISI 316.
Standard: FKM and PU.
Approval: API 16D.

TEMPERATURE RANGE


-25°C up to +100°C.

THREADS

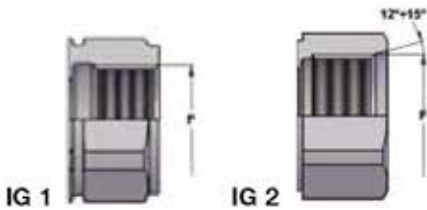

PVTX BOP DN25 - BG 4 - ISO 19

Symbol	L2	L3	F	Standard	Female			Male		
					COD.F	Weight (g)	Packaging (pcs.)	COD.M	Weight (g)	Packaging (pcs.)
IG 1	95.5	102	BSP 3/4	DIN 3852-2-X	PVTX.2519.112 BOP	754	12	PVTX.2519.113 BOP	751	12
	95.5	102	NPT 3/4	ANSI B1.20.3	PVTX.2519.012 BOP	759	12	PVTX.2519.013 BOP	758	12
	97.5	102	BSP 1	DIN 3852-2-X	PVTX.2525.112 BOP	725	12	PVTX.2525.113 BOP	693	12
	97.5	105	NPT 1	ANSI B1.20.3	PVTX.2525.012 BOP	740	12	PVTX.2525.013 BOP	830	12
IG 2	95	105	1 5/16-12 UN 2B	SAE J 1926-1	PVTX.2533.032 BOP	703	12	PVTX.2533.033 BOP	687	12

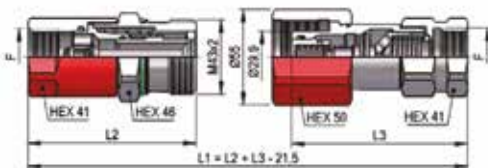



PVTX BOP

FLAT FACE SCREW API 16D 316SS

PLASTIC CAPS

Nominal size			Female dust plug					Male dust cap					Colour	Material
DNP	BG	ISO	COD.F	D*	L*	D1*	Weight (g)	COD.M	D*	L*	D1*	Weight (g)		
25	4	19	SPVT.25002	53	290	47.5	72	SPVT.25003	48	290	47.5	74	Black	PVC


* Dimensions.



METAL CAPS

Nominal size			Female dust plug					Male dust cap					Material
DNP	BG	ISO	COD.F	D*	L*	D1*	Weight (g)	COD.M	D*	L*	D1*	Weight (g)	
25	4	19	SPVT.25202	49.5	275	47.5	84	SPVT.25203	48	275	47.5	115	Aluminum

* Dimensions.

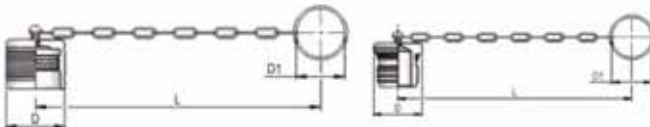

SPARE PARTS

Nominal size			Female gasket		
DNP	BG	ISO	OR-E (VITON)	OR (VITON)	BK (PTFE)
25	4	19	PVT.025.121 V	PLT.025.120 V	PLT.025.130

