

# SL3

Next-generation crimper for low pressure hose assemblies. Two-in-one solution with integrated die sets O5 and O15 for DN 03-16. With the SL 3-16 M, UNIFLEX innovates the existing crimper: Two integrated die sets in one tool. No more lost time changing the die. Just change the handle and you are already crimping the other size. There is no risk of losing dies, no dirty hands, no "time lost". With the built-in handle, you can easily carry it anywhere.

SL 3-32 M and SL 3-75 complete the range with large opening travel up to 3".


**SL 3-16M**



**SL 3-32 M**



**SL 3-75**

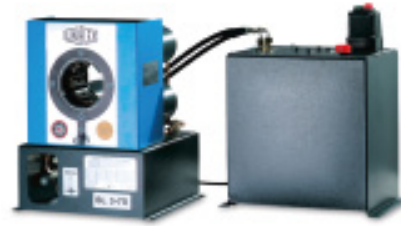

Technical Data	SL 3-16 M	SL 3-32 M	SL 3-75 M
Crimp force (kN/Ton)	30/3	200/20	500/50
Opening travel (mm/inch)	+31.7/+1.24	+36.7/+1.44	+55/+2.16
Industrial	5/8**	1 1/4" **	3**
Opening without dies (mm/inch)	38.6 / 1.52	88 / 3.46	115 / 5.52
Types of dies	150	263	239
Master dies length (mm/inch)	10/0.39	68/2.68	75/2.95
L x W x H (mm)	340 x 143 x 780	216 x 165 x 348	420 x 520 x 550
Weight	20 kg	28 kg	88 kg

Package dies

263	
D Types of die	PB263-XX-D Length (mm)
6.8	40
9	75
12	75
14	75
17	75
20	75
24	75
28	75
32	75
36	75
40	75
44	75
47	75

Package dies

239-XX-Ø-YY	
D Types of die	239-xx-Ø-YY (mm)
6.8	50
9	50
10	50
12	50
14	65
16	65
17	60
19	60
20	60
22	60
24	60
26	75
28	75
30	75
31	75
32	75
34	75
36	75
38	75
39	75
40	75
44	75
47	75
50	75
54	75
57	75 75
62	100



The best return on Investment since 1972.